


MARINE BOLLARDS

ISO13799:2012 Recessed Bollard

Recessed shell bitts are produced to be used on vessels using the Panama and Suez Canal or where the rope needs to be attached to a ship's hull without any protrusion.

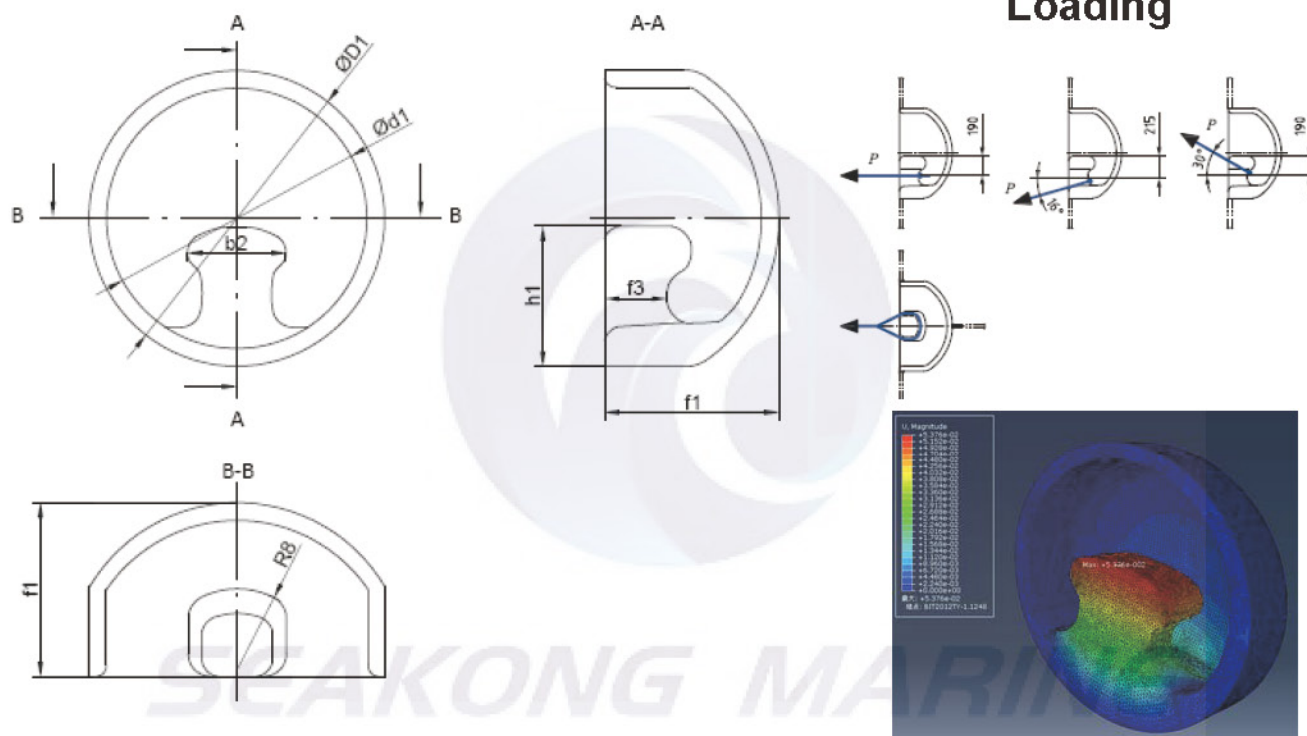

SWL (tonne)	Material (min.yield strength)	D1	d1	b2	f1	f3	h1	R8	Weight (kg)
75	235N/mm ²	850	750	280	500	180	400	250	770
110	350N/mm ³								770
135	430N/mm ⁴								770
100	235N/mm ⁵	920	812	300	544	195	430	270	826
150	350N/mm ⁶								826
180	430N/mm ⁷								826

Qingdao Seakong Marine Machinery Co.,Ltd

No.19 Qutangxia Road, Shinan District, Qingdao City, China

Tel. +86 532 89922862 Fax. +86 532 89922862

Email: sales@seakongmarine.com Web: www.seakongmarine.com